

XPR-INOX SERIES

STAINLESS STEEL
FLEXIBLE COUPLINGS





0-3,000 Nm

DESCRIPTION

- ◆ Series of couplings made of 316-L quality stainless steel.
- ◆ For activities that, due to their high demands, require materials that ensure extreme resistance to oxidation. Shipbuilding, food, chemical industries, etc.

FEATURES

- ◆ Flexible Spider-shaped torque couplings with flange connection on both sides.
- ◆ Custom-made screw fastening system.
- ◆ Allows radial disassembly without moving the driving or driven part.
- ◆ External mounting spider, designed for quick and easy maintenance.

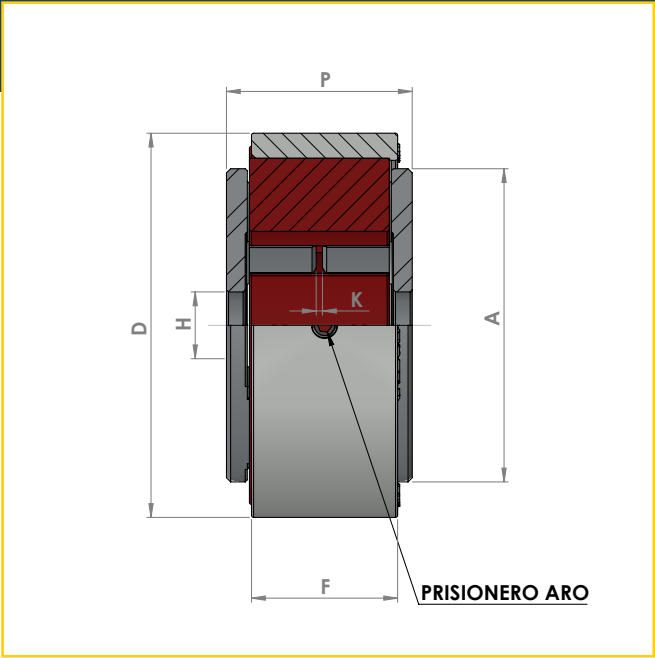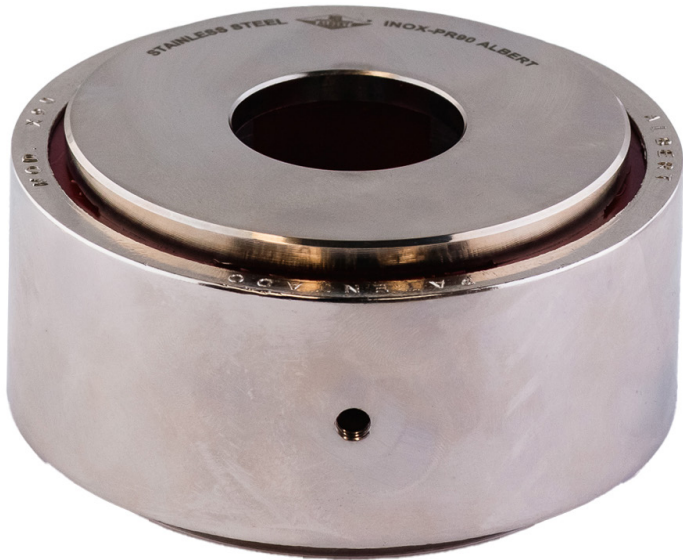

Reference	Spider	Par Nominal (Nm)	MAX R.P.M.	A	D	P	H	F	K	Weight (kg)
		92°ShA								
INOX XPR-75	X-75	130	9.500	75	92	45	37	35	2	0,8
INOX XPR-90	X-90	270	8.000	90	108	54	37	43	2	1,3
INOX XPR-105	X-105	400	7.000	105	125	59	19	45	2	2,3
INOX XPR-120	X-120	600	6.000	120	142	61	23	45	2	3
INOX XPR-135	X-135	900	5.500	135	159	70,5	23	54	2,5	4,5
INOX XPR-150	X-150	1.350	4.500	150	175	78,5	26	60	2,5	5,9
INOX XPR-175	X-175	1.810	4.000	175	200	90,5	26	68	2,5	9
INOX XPR-200/35	X-200	3.000	3.500	200	225	99	26	76	3	12,8