

# XPR SERIES


**FORGED STEEL**  
FLEXIBLE COUPLINGS



0-3,000 Nm

## DESCRIPTION

- ◆ Torsion-flexible claw couplings with a compact and lightweight design. Forged steel guarantees a long service life and excellent performance.
- ◆ The couplings feature a nickel surface treatment, which provides protection against corrosion.
- ◆ For the same Spider size, all series are interchangeable, offering great versatility for any application.

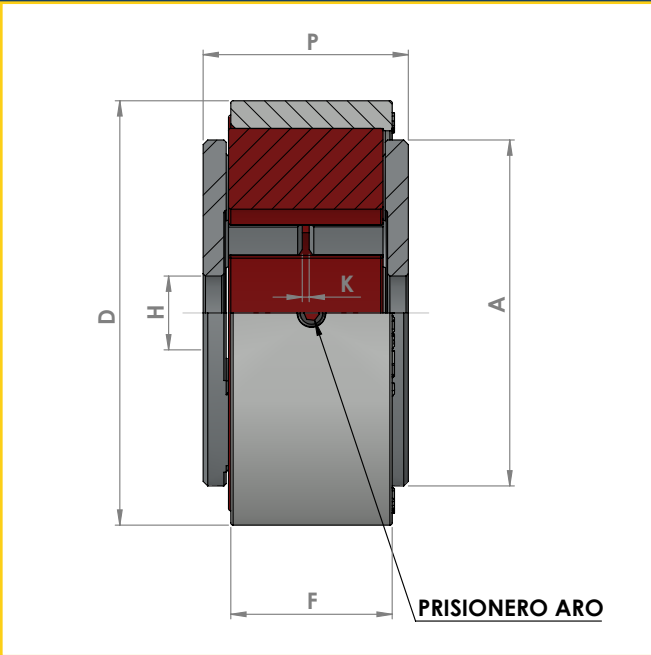

## FEATURES

- ◆ Flexible Spider-shaped torque couplings with flange connection on both sides.
- ◆ Custom-made screw fastening system.
- ◆ Allows radial disassembly without moving the driving or driven part.
- ◆ External mounting spider, designed for quick and easy maintenance.



Reference	Spider	Par	MAX R.P.M.	A	D	P	H	F	K	Weight (kg)
		Nominal (Nm)								
		92°ShA								
XPR-75	X-75	130	9.500	75	92	45	37	35	2	0,8
XPR-90	X-90	270	8.000	90	108	54	37	43	2	1,3
XPR-105	X-105	400	7.000	105	125	59	19	45	2	2,3
XPR-120	X-120	600	6.000	120	142	61	23	45	2	3
XPR-135	X-135	900	5.500	135	159	70,5	23	54	2,5	4,5
XPR-150	X-150	1.350	4.500	150	175	78,5	26	60	2,5	5,9
XPR-175	X-175	1.810	4.000	175	200	90,5	26	68	2,5	9
XPR-200/35	X-200	3.000	3.500	200	225	99	26	76	3	12,8