

AL SERIES

FLEXIBLE
COUPLINGS



0-650 Nm

DESCRIPTION

- Flexible claw couplings characterised by their light weight and corrosion resistance. Used in medium to high corrosive environments, up to category C4.

FEATURES

- Economical series of torsion-flexible Spider couplings.
- Shaft fixing system Available with keyway or clamp.
- Manufactured in various lengths.

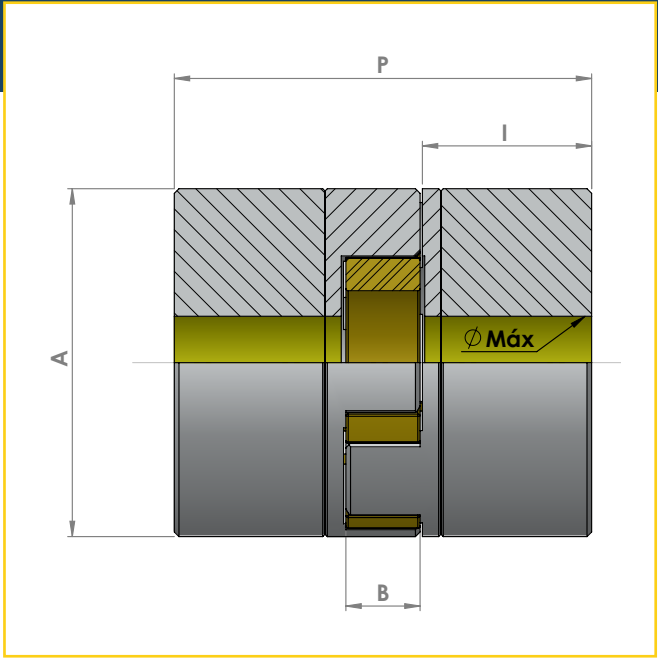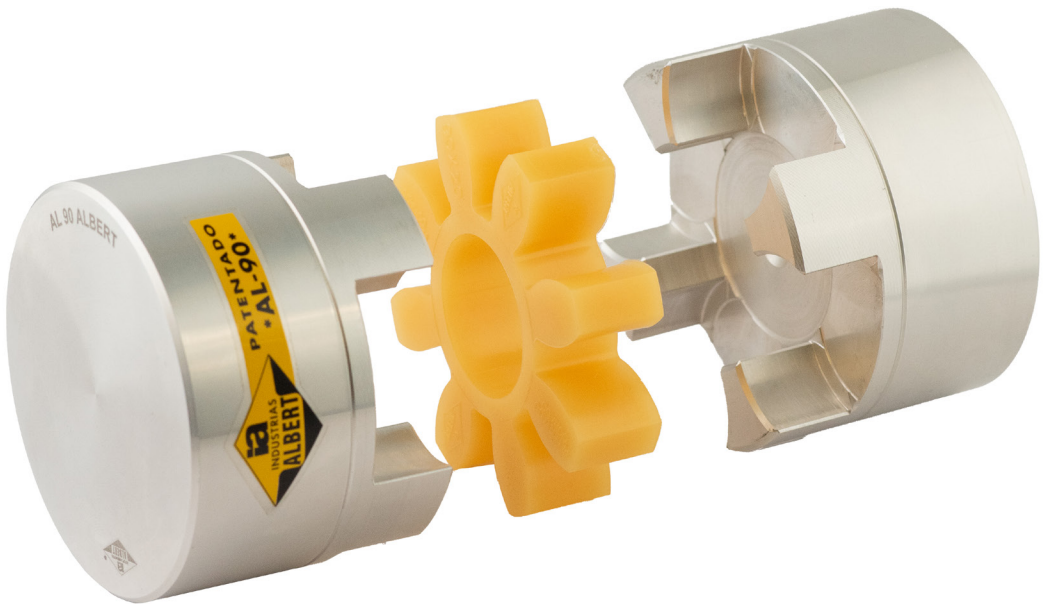

			Nominal Torque (Nm)								
Reference	Spider A x B	Max Ø Axes	85° ShA	90° ShA	92° ShA	98° ShA	64° ShD	R.P.M MAX	P	I	Weight (kg)
AL-50	50x10	24	12	12	15	25	30	12.000	60	25	0,3
AL-60	60x14	32	35	35	40	65	80	11.000	75	30,5	0,5
AL-75	75x16	38	80	80	100	170	210	9.500	90	37	1
AL-90	90x20	48	160	160	210	370	460	8.000	105	42,5	1,5
AL-105	105x20	55	270	270	310	525	650	7.000	120	50	2,5

